



---

## Title Name (Arial 16)

---

Author's Name (Times new roman 12)

<sup>1</sup>Assistant Professor, Department of Information Technology, Hindustan Institute of Technology and Science, Chennai, India. E-mail:[bvb.ithits@gmail.com](mailto:bvb.ithits@gmail.com).

### Abstract

Page layout must be in letter size with Margin: Top 1", Bottom 1", Left 1", Right 1", Gutter 0", and Gutter Position Left. Header 0" & footer 0", section starts continuous and apply to whole document. JGE logo should be aligned in left side with 1.16" height and 1.41" width. Journal name should be aligned right **with Font Andalus, size 14 and bold.** The volume number and issue number should be in Times news roman with size 12[It should be enclosed within the header]. In footer, Alpha logo should be aligned in right with 0.5 heights and 1.42 widths. The title should be start after 8 spaces from the header. Paper Title must be aligned in center with Font Arial, Size 16, Bold, Capitalized each word. After one line space from the title, Authors Name must be aligned in center with Font Times New Roman, Size 12. After one line space from the author's name, Author's affiliation details must be aligned left with font Times new roman, size 10, Italic. After one line space from the detail, Abstract (heading) must be aligned in left with Font Arial, Size 11, bold. Total words in abstract should be less than or equal to 250 words. All heading's content should be start after one space. Abstract content must be aligned justify with Font Times New Roman, Size 11 and single line spacing. Keyword (heading) must be in Font Arial, Size 11, bold. Keyword (content) must be in font Times New Roman, size 11 and it should have at least 5 terms. All paper content must be aligned justify with Font Name Times New Roman, Size 11, special first line 0.23" and line spacing Single. All MAIN HEADING must be aligned left with Font

Arial, Size 12, Bold, Capitalized each word, left, and Numbering (1,2,3...etc.). All Sub Heading must be aligned left with Font Arial, Size 11, Capitalized each word, italic, Bold, and Numbering (1.1,1.2,... etc). References heading must be aligned left with Arial, sentence case, bold, Font Size 12 and line spacing single. References must be aligned justify with Times New Roman, Size 11, line spacing single. Biographies (title) must be aligned left with Arial, bold, size 12, line spacing single and their content is in Times New Roman, size 11, single line spacing. Author's name should be in bold and author's photo should be in good resolution with height 1.08, width 1.05. All the references should be in IEEE format. All tables and figures should be aligned in center. All pages excluding first page should start with after 5 line spaces. In first page, above footer give content " **Journal of Green Engineering, Vol. 8 1, 1-5. Alpha Publishers. This is an Open Access publication. © 2018 the Author(s). All rights reserved**" in two lines with font Times new roman, size 10 and left alignment. In all even pages , provide page number and author's name aligned left side with Times new roman, size 10, italic, and line spacing. In all odd pages , provide title and page number aligned right side with Times new roman, size 10, italic and line spacing.

**Keywords** Datacenter design, energy efficiency of datacenter, energy efficient metrics, datacenter, carbon footprint computation.


## 1 Introduction

Energy efficiency and low carbon strategies have attracted a lot of concern. The goal for 20% energy efficiency and carbon reduction by 2020 drove the Information Communication Technologies (ICT) sector to strategies that incorporate modern designs for a low carbon and sustainable growth [1, 2]. The ICT sector is part of the 2020 goal and participates in three different ways. In the direct way, ICT are called to reduce their own energy demands (green networks, green IT), in the indirect way ICT are used for carbon displacements and in the systematic way ICT collaborate with other sectors of the economy to provide energy efficiency (smartgrids, smart buildings, intelligent transportations systems, etc...). ICT and in particular data centers have a strong impact to the global CO<sub>2</sub> emissions. Moreover, an important part of the OPEX is due to the electricity demands. This paper presents the sources and challenges that have to be addressed to reduce carbon emissions and electricity expenses of the sector demands without considering the data volume. Taking

into consideration this ratio, green IT technologies have important benefits in terms of:

- Reduce electricity costs and OPEX;
- Improve corporate image;
- Provide sustainability;
- Extend useful life of hardware;
- Reduce IT maintenance activities;
- Reduce carbon emissions and prevent climate change
- Provide foundations for the penetration of renewable energy sources in IT systems.

## 2 Data Center Infrastructures and Power Consumption

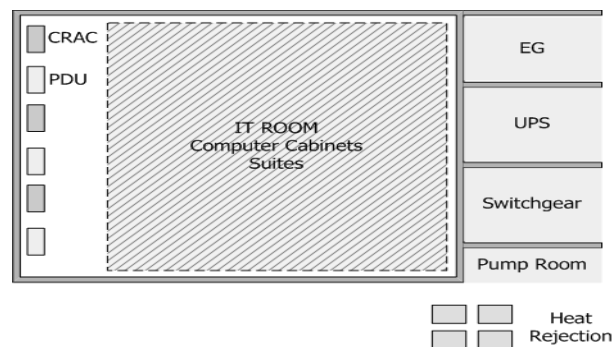

**Figure 1** Typical Data Center Infrastructure

The overall design of a data center can be classified in 4 categories Tier I-IV each one presenting advantages and disadvantages related to power consumption and availability [18, 19]. In most cases availability and safety issues yield to redundant N+1, N+2 or 2N data center designs and this has a serious effect on power consumption. According to Figure 1, a data center has the following main units

## 2.1 Power Consumption in Data Centers

Maximum capacity workloads, the efficiency of the UPS cannot be considered constant and equal to the imposed by the manufacturer value.

In general energy efficiency in the telecommunication industry is related to,

$$\text{Energy Efficiency} \sim \frac{\text{Joule}}{\text{bit}} \sim \frac{\text{Watt}}{\text{Gbps}} \sim \frac{\text{Watt}}{\text{bitrate/Hz}} (\text{spectral efficiency}) \quad (1)$$

The optimal description of this value depends on the system's characteristics and the type of equipment. As an example, for modulation and coding techniques in wireless communications the spectral efficiency is

a common measure. For electronic components the ratio of joule per bit best describes performance. In telecommunication networks and datacenters the ratio of watts consumed over the Gbps of data processed is preferred. In [22] absolute energy efficiency metric is introduced, named as dBε. The metric is computed according to the equation

$$dB\epsilon = 10 \log_{10} \left[ \frac{\text{Power / bitrate}}{kT \ln 2} \right] \quad (2)$$

## References

- [1] F. Ronilaya et al., "A double stage micro-inverter for optimal power flow control in grid connected PV system", International Conference on Information and Communications Technology (ICOIACT), Yogyakarta, Indonesia, pp. 808-813, 2018.
- [2] Xifei Cao, Weiqiang Zhang, "Grid-connected solar Micro-inverter reference design", International Conference on New Technology of Agricultural, Zibo, pp. 239-243, 2011.
- [3] R.Mahalakshmi, H.V.Manjunath, K.C.Sindhu Thampatty, "Design and implementation of Quadratic buck boost converter for PV array" International Journal of Advanced Engineering Research" Vol.10, No.1, pp.1023-1028, 2015.

## **Biographies**



**S.XXXXX** received his B.Tech degree in Electrical and Electronics Engineering from xxxxxxxx, xxxxxxxx, India in the year 2018. His area of interests includes Renewable Energy, Power Electronics etc.,